



Mealstream EC401

The Mealstream EC401

combination oven which

offers excellent results for

any call order menu.

Ideally suited for kitchens

where space is at a premium.

- Microwave combination mode reduces cooking times by up to 10 times.
- Easy to clean digital touch pad control.
- Fully programmable (up to 10 programs) including multi-stage programming (up to 3 stages per program).
- User friendly operation.
- Quick pre-heat time (15 min).
- In-built diagnostics to avoid unnecessary service calls.
- 4 microwave power levels allow the most delicate products to be cooked. (e.g. frozen baguettes).
- Quality assured BS EN ISO 9001 accreditation and CE marked.
- Menu Key option.

Mealstream EC401



Technical Specifications

	EE5	XE5	XX5	
Power output	Microwave @ 100%	700	700	1000 (watts)
	Convected heat	3000	3000	3000 (watts)
	Combination mode	700/1500	700/3000	1000/3000 (watts)
Power input	3.12	4.6	5.3kW	
Weight	45	45	55kg Nett	
Electrical supply	240V 50Hz Single Phase or 220V 50Hz Single Phase 60Hz available for marine specification, please ask for details			
Dimensions mm (HxWxD)				
Internal	315 x 330 x 330			
External	527 x 545 x 555			
Capacity	34.3 Litres			
Microwave power levels	100%, 75%, 50% and convection only			
Magnetrons	Two			
Safety interlocks	Three			
Distribution system	Rotating cooking carousel			
Convection heat settings	OFF, 150, 175, 200, 225, 250, 275° C			
Timer	Up to 29m 59s (Up to 3 x 29m 59s with multi-stage programs)			
Timer controls	Digital touch pad control			
User interface	Built-in diagnostic messages Digital LED display of cooking time Easy-to-use pre-programmed operation 10 programs Numerical display of actual cavity temp			
Construction	Cavity – Stainless Steel Casework – Stainless Steel			
Safety features	Microwave safety interlocks on door Cavity overheat sensor Automatic lock-out on invalid time setting Magnetron overheat sensors			
Additional information	EE5	Moulded 13 Amp plug BS 1363A (UK only)		
	XE5	30 Amp lead with plug BS4343		
	XX5	30 Amp lead with plug BS4343		
Order ref	240V 50Hz 13A supply	RMC100345EE5		
	240V 50Hz 30A supply	RMC100345XE5		
	240V 50Hz 30A supply	RMC100345XX5		
	Other power supply variations are available			

Installation requirements

- Away from major heat sources.
- Place on a flat surface that is level, strong and stable.
- Allow a minimum of 100mm (per oven) clearance at the rear of the oven and to either side for air to circulate freely.
- Allow 100mm clearance above the oven for hot air to escape.
- Do not stack the oven directly on top of another. Use a separate shelf or double tiered stand (for stand and trolley price on application).
- Allow sufficient clearance in front of the oven for the door to open fully (393mm).

DEALER

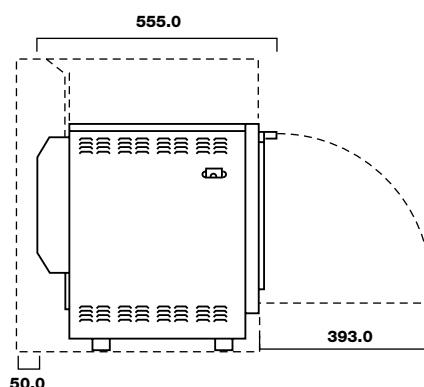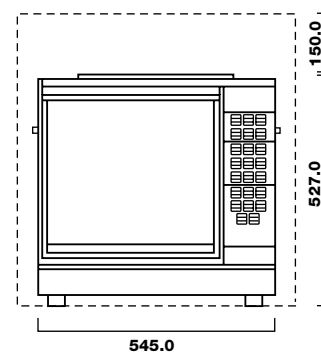

All dimensions in mm



For further information on Merrychef products and services or advice on which machine suits you best please contact:

Merrychef Limited Station Road West
Ash Vale Aldershot Hampshire GU12 5XA
United Kingdom

Telephone: +44 (0)1252 371000

Fax: +44 (0)1252 371007

Email: marketing@merrychef.co.uk

Web: www.merrychef.co.uk



ASSOCIATE MEMBER



Merrychef continually strives to improve its products and reserves the right to make any improvements or change the specifications of any of its products at any time.

© Merrychef Limited. All rights reserved.

REF: 32Z3376. ISSUE 2.